


Typical OEM configuration

We will make a custom configuration per your specification

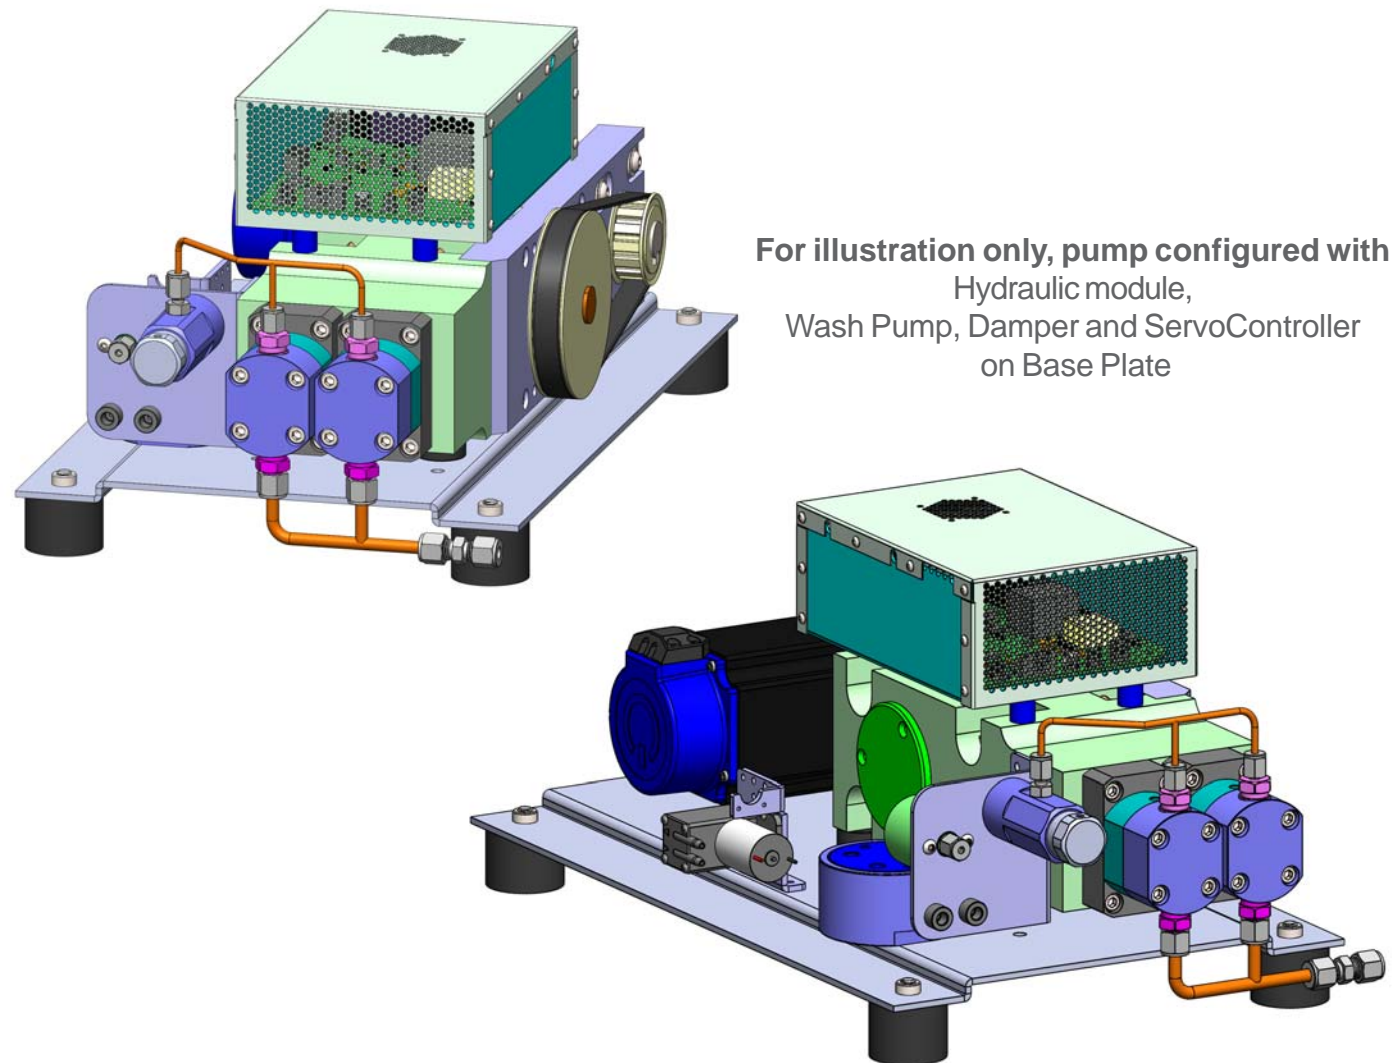

Analytical Scientific Instruments US, Inc.  
3023 Research Drive Richmond CA 94806 USA  
www.hplc-asi.com Phone: 510-669-2250 info@hplc-asi.com

**ASI** *Analytical Scientific Instruments US*

Copyright © 2014 ASI - Analytical Scientific Instruments US, Inc.  
Rev. 7\_17\_2020

# 545 Star Prep Pumps *New*

- Advanced pump performance designed for Prep chromatography
- Reliable low cost solution with state-of the art Modbus RTU control
- Isocratic, Gradient or Metering fluid flow applications
- Available with integral wash pump option

## ASI 545 Series Features:

- ❖ Intuitive Touchscreen display
- ❖ USB-serial connection
- ❖ Computer GUI and Modbus RTU communications via USB or RS485
- ❖ Available in Stainless Steel, Titanium and Biocompatible PEEK
- ❖ 150 mL/min., 250 mL/min., 500 mL/min. and 1,500 mL/min. available
- ❖ Self-priming Pump Head  
Integral prime/purge for rapid solvent changes and self-priming
- ❖ Solvent Compressibility Compensation  
User can select from a library of 15 solvents  
Fourteen additional user-configured solvents
- ❖ Easy Maintenance  
All user serviceable components are accessed via the front panel  
Cartridge seal design makes seal replacement easy



**ASI**

Preliminary 545 Prep Scale Pump Specifications

Part Numbers	Flow Range	Pmax
545-0150HP	0.100 mL/min. - 25 mL/min.	10,000 PSI
	25 mL/min. - 100 mL/min.	6,000 PSI
	100 mL/min. - 150 mL/min.	4,000 PSI
545-0150	0.100 mL/min. - 100 mL/min.	6,000 PSI
	100 mL/min. - 150 mL/min.	4,000 PSI
545-0250	0.200 mL/min. - 250 mL/min.	4,000 PSI
545-0500	4.00 mL/min. - 500 mL/min.	2,000 PSI
545-1500	10.0 mL/min. - 1,500 mL/min.	500 PSI

Pulsation:	1% Δ P/P *
Flow Precision:	0.25%, 10 - 100 mL/min.*
Flow Accuracy:	± 100 µL/min. or ±1% of selected flow rate whichever is greater*
Gradient Accuracy:	±1% with aqueous acetone/water, at 5 - 95%, 100 mL/min.*
Wetted Materials:	316 Stainless Steel, PEEK, Titanium, PTFE or UHMW, YSZ Ceramic, Sapphire & Ruby

\*All specifications are under load conditions of 500 PSI & temperature of 20° Celsius.

Dimensions: 11.5” W x 20.75” D x 11.25” H

Weight: 65 lbs.

Power: International AC input 220/240VAC & 50/60Hz

545 Gradient Options


545 pumps are different than 540 pumps in that they are intended to be stand-alone metering pumps. In order to make gradients a gradient option must be purchased. There are two options:

1. **Low pressure proportioning valve controller:** This includes a separate gradient controller and a proportioning valve assembly that generates a gradient by proportioning the solvents at the inlet of a *single pump*. The advantage is its simplicity and cost.
2. **Hi pressure gradient controller:** this is a separate gradient controller which controls multiple 545 pumps (one pump for each solvent) to generate a high pressure gradient. The advantage of high pressure gradients is their accuracy/precision.

What can we engineer for YOU?

ASI has supplied custom OEM pump assembly solutions for

Proteomics-LCMS  
Process Instrumentation  
Pharmaceutical Manufacturing  
Supercritical Fluid Chromatography  
Preparative Chromatography  
Biotech and SEC/GPC Systems

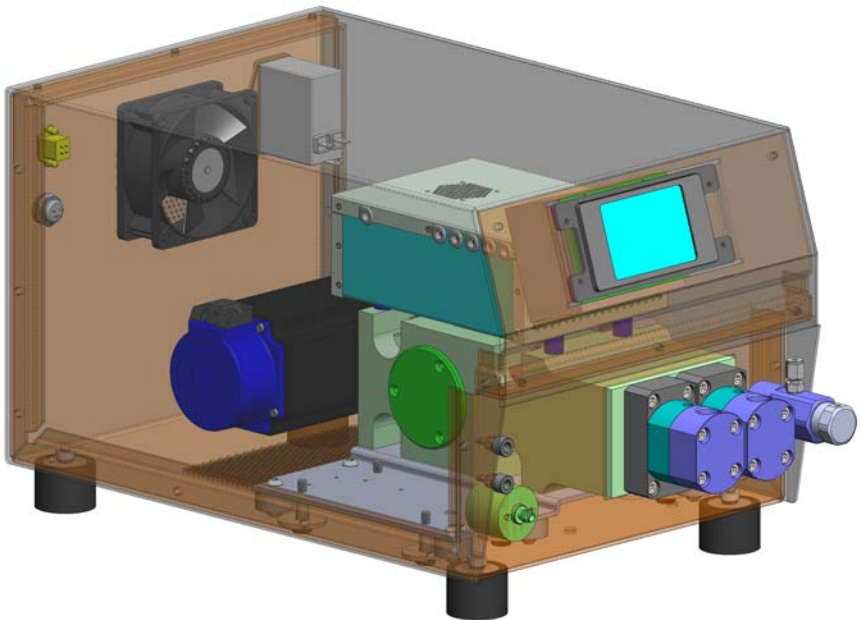

Pump Assembly in chassis

Wash Pump and Damper are available for custom configuration

See next page for illustration of a typical OEM configuration

We will make a custom configuration per your specification